



LED SPECIFICATION



ATTENTION

OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES


330LB7C

➤ Features:

- Single color
- High bright output
- Low power consumption
- High reliability and long life

➤ Descriptions:


- Dice material: InGaN
- Emitting Color: Super Bright Blue
- Device Outline: ϕ 3mm Round Type
- Lens Type: Water Clear

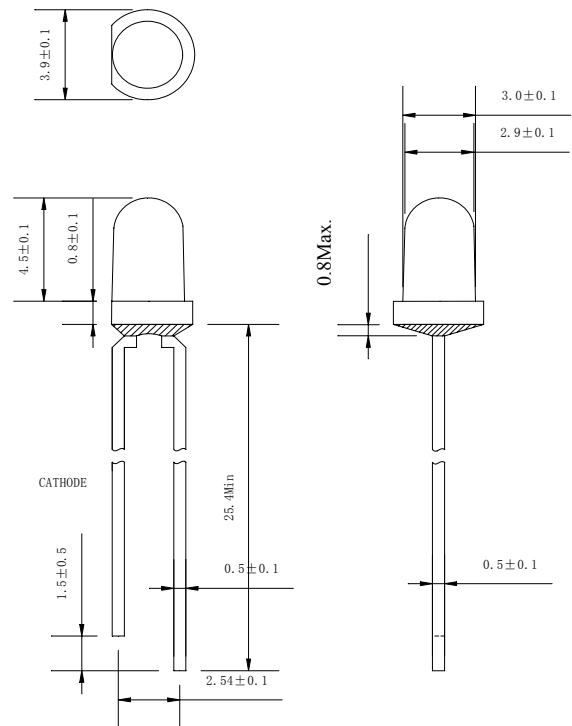

➤ Directivity:

All dimensions are millimeters.

Tolerance is $\pm 0.25 \text{ mm}$ unless otherwise noted.

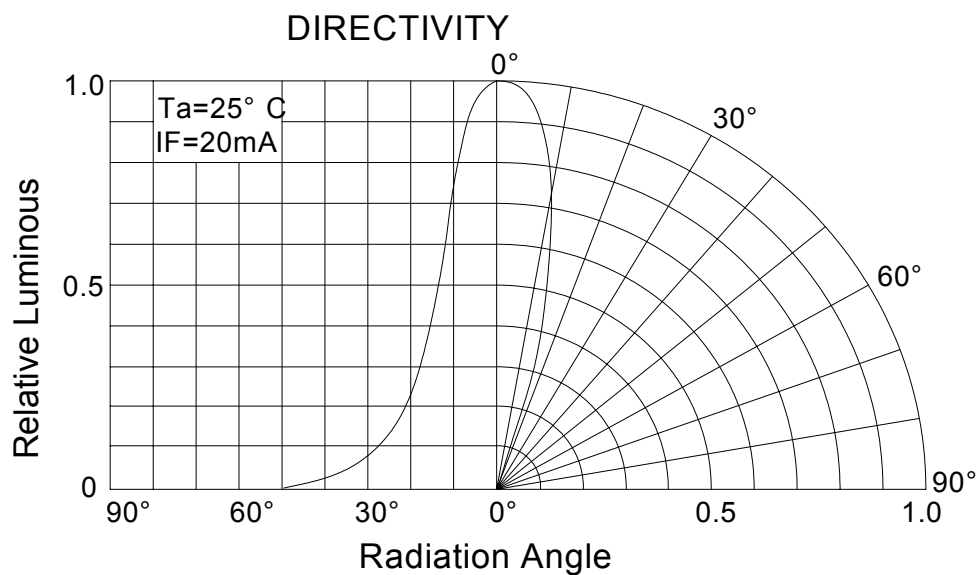



LED SPECIFICATION

330LB7C

➤ Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	VR	IR = 30 μ A	5	--	V
Forward Current	IF	----	----	25	mA
Power Dissipation	Pd	----	----	90	mW
Pulse Current	Ipeak	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	Topr	----	-20	+85	°C
Storage Temperature	Tstr	----	-25	+100	°C

➤ Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	VF	IF=20mA	----	3.2	3.6	V
Reverse Current	IR	VR=5V	----	----	30	μ A
Dominate Wavelength	λ_d	IF=20mA	----	470	----	nm
Peak Wavelength	λ_p	IF=20mA	----	468	----	nm
Spectral Line half-width	$\Delta \lambda$	IF=20mA	----	20	----	nm
Luminous Intensity	Iv	IF=20mA	----	1500	----	mcd
Viewing Angle	2 $\theta_{1/2}$	IF=20mA	24.....	27.....	30	deg.

Luminous Intensity Bins (Ta = 25°C)

Unit:mcd

Bin	S	T	U	V	W
Min	770	1100	1520	2130	3000
Max	1100	1520	2130	3000	4180

➤ Dominate Wavelength Bins Unit:nm

Bin	B4	B5
Min	465	470
Max	470	475



LED SPECIFICATION

330LB7C

➤ Typical electrical/optical characteristic curves:

