

COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C

Item No.: 221-415



COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	221-415
GTIN / EAN	4055143234658
Content	1
Order amount	25
Customer item number	

Notes

Technical data

Miscellaneous


Total number of connection points	5
Total number of potentials	1
Color	transparent
Ratings according to 1	EN 60664
Rated voltage (II / 2) [V]	450 [V]
Rated surge voltage (II / 2) [kV]	4 [kV]
Nominal current [A]	32 [A]
Connection technology	CAGE CLAMP®

Technical data	
<i>Number of connection points</i>	5
<i>Actuation type</i>	Push-in
<i>Connectable conductor materials</i>	Kupfer
<i>Nominal cross section</i>	4 mm ²
<i>Solid sizes</i>	0.2 ... 4 mm ² / 24 ... 12 AWG
<i>stranded, connectable</i>	0.2 ... 4 mm ² / 24 ... 12 AWG
<i>Fine-stranded wires</i>	0.14 ... 4 mm ² / 24 ... 12 AWG
<i>Strip length</i>	11 mm / 0.43 in
<i>Type of wiring</i>	Side-entry wiring
<i>Flammability rating per UL 94</i>	V2
<i>Weight [g]</i>	4.048 [g]
<i>Width</i>	29.9 mm / 1.177 in
<i>Height</i>	8.3 mm / 0.327 in
<i>Length</i>	18.6 mm / 0.732 in
<i>Safety information 1</i>	In grounded power lines

Printview: COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C - Item No.: 221-415

Images & drawings



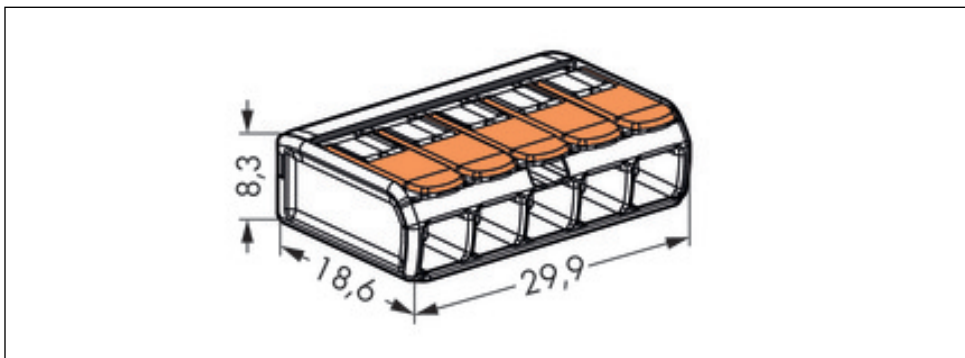

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.