

# 1500 Twin Units Switches and Indicators 16A 250Vac



- ▶ Twin unit rocker switch
- ▶ Choice of switching circuits including 3 position
- ▶ Push-on, solder and PCB terminals
- ▶ Choice of bezel styles
- ▶ Choice of panel cut outs
- ▶ Matching indicator
- ▶ Single pole
- ▶ Splashproof option
- ▶ Cut out size 'A' style 27.2 x 22.3



16(4)A 250Vac T125



UL CSA 16A 250Vac

UL CSA (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac

1/2hp, 125Vac 1/4hp

UL 85°C, file E45221, CSA file LR10990

In house test

Inrush 36A to EN61058-1

For versions with High Inrush or for 50,000 operations, see page 20.

RoHS

RoHS compliant

3mm contact gap except where marked  $\mu$ .


Technical data on pages 4 & 5 (switches), 6 (indicators).

**C 1500 A / C 1510 A L ---**

TERMINAL FUNCTION ROCKER TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ ROCKER
<b>C</b>  6.3 x 0.8	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 1 or 4 	<b>A</b> Softline (Matt) 
<b>H</b>  4.8 x 0.8	<b>1500</b> ON - OFF 	<b>B</b> Softline splashproof (Matt) 
<b>K</b>  2.8 x 0.8	<b>1510 <math>\mu</math></b> <small>HP rating N/A</small> ON - ON 	<b>W</b> Curved splashproof (Matt) 
<b>T</b>  Solder	<b>1520 <math>\mu</math></b> <small>125V &amp; 250V 1/2 HP H terminal rated T100 only</small> ON - OFF - ON 	<b>X</b> Two colour (Matt) (not momentary) ON - OFF only 
<b>X</b>  PCB 0.8Sq	<b>0430</b> <small>X terminal N/A</small> Indicator Technical data on page 6 	<b>A</b> Softline lens (Matt) (Indicator) 

## Enhanced Splashproofing

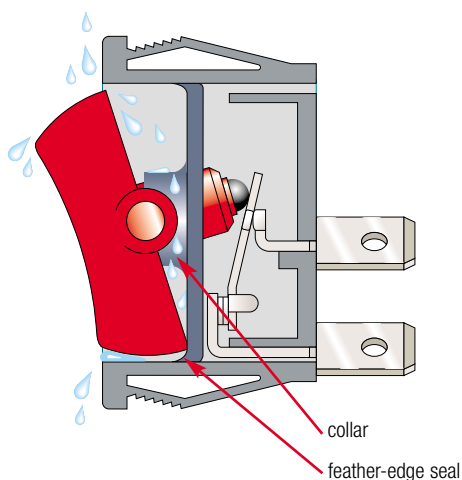

### 1500 W and B splashproof options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytel collar/seals for enhanced protection.



C1500A/C1500AL



C1500A/C0430AL




C1500X/C1500XL



C1520A/C1510AL



C1500A/C1520AL




C0430A/C0430AL


rocker  
switches

## BODY


### A Panel cut-outs




### B




### L




### Q



### R



### T



Cut-outs must be punched in the direction of insertion

## OPTIONS


**Finish** Matt is standard.

**Colour** Call sales for custom colours. A full range is available for large orders.

**Legend printing** Call sales for custom legends. State if a legend is to appear on the left or right hand unit (viewed from the front).

**Lamp voltage** Call sales for details.

## DIMENSIONS (mm)




Call sales for terminal spacing details

### Panel thickness

A,Q	0.75 to 3.3mm
L,B,T	0.75 to 2.5mm
R	0.75 to 3.0mm

## Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double pole body.

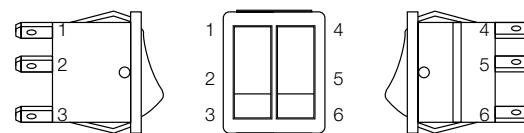

For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly. (This has terminal numbers 1, 2 & 3)

## Examples of printing



EN602A



EN730