

Metallized Polyester (PET) Capacitors in PCM 5 mm

Special Features

- High volume/capacitance ratio
- Self-healing
- According to RoHS 2011/65/EU

Typical Applications

For general DC-applications e.g.

- By-pass
- Blocking
- Coupling and decoupling
- Timing

Construction


Dielectric:

Polyethylene-terephthalate (PET) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

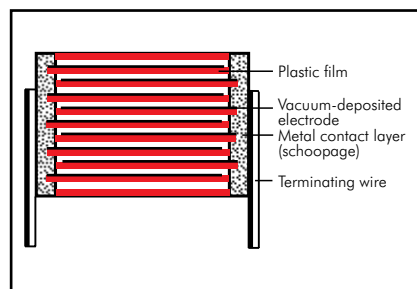

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Silver/White.
Epoxy resin seal: Red

Electrical Data

Capacitance range:

0.01 μF to 10 μF (E12-values on request)

Rated voltages:

50 VDC, 63 VDC, 100 VDC, 250 VDC,
400 VDC, 630 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

-55°C to $+100^\circ\text{C}$ ($+125^\circ\text{C}$ available
subject to special enquiry)

Climatic test category:

55/100/21 in accordance with IEC

Insulation resistance at $+20^\circ\text{C}$:

U_r	U_{test}	$C \leq 0.33 \mu\text{F}$	$0.33 \mu\text{F} < C \leq 10 \mu\text{F}$
50 VDC	10V	$\geq 5 \times 10^3 \text{ M}\Omega$ (mean value: $3 \times 10^4 \text{ M}\Omega$)	$\geq 1000 \text{ sec (M}\Omega \times \mu\text{F)}$ (mean value: 3000 sec)
63 VDC	50V	$\geq 1 \times 10^4 \text{ M}\Omega$ (mean value: $5 \times 10^4 \text{ M}\Omega$)	$\geq 1250 \text{ sec (M}\Omega \times \mu\text{F)}$ (mean value: 3000 sec)
$\geq 100 \text{ VDC}$	100V	$\geq 1.5 \times 10^4 \text{ M}\Omega$ (mean value: $1 \times 10^5 \text{ M}\Omega$)	$\geq 3000 \text{ sec (M}\Omega \times \mu\text{F)}$ (mean value: 6000 sec)

Measuring time: 1 min.

Dissipation factors at $+20^\circ\text{C}$: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 8 \times 10^{-3}$	$\leq 8 \times 10^{-3}$	$\leq 10 \times 10^{-3}$
10 kHz	$\leq 15 \times 10^{-3}$	$\leq 15 \times 10^{-3}$	–
100 kHz	$\leq 30 \times 10^{-3}$	–	–

Maximum pulse rise time: for pulses equal to the rated voltage

Capacitance μF	Pulse rise time V/ μsec max. operation/test					
	50 VDC	63 VDC	100 VDC	250 VDC	400 VDC	630 VDC
0.01 ... 0.022	–	35/350	35/350	50/500	80/800	110/1100
0.033 ... 0.068	–	20/200	25/250	50/500	80/800	90/900
0.1 ... 0.47	10/100	15/150	20/200	50/500	80/800	–
0.68 ... 1.0	8/80	12/120	15/150	25/250	–	–
1.5 ... 3.3	8/80	7.5/75	10/100	–	–	–
4.7	5/50	5/50	–	–	–	–
6.8	3/30	3/30	–	–	–	–
10	2.5/25	–	–	–	–	–

Mechanical Tests

Pull test on pins:

10 N in direction of pins according to
IEC 60068-2-21

Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm
displacement amplitude or 10 g in
accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with
IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec² in
accordance with IEC 60068-2-29

Packing

Available taped and reeled.

Detailed taping information and graphs
at the end of the catalogue.

For further details and graphs please
refer to Technical Information.

Continuation

General Data


Capacitance	50 VDC/30 VAC*					63 VDC/40 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF						2.5	6.5	7.2	5	MKS2C021001A00_____
0.015 "						2.5	6.5	7.2	5	MKS2C021501A00_____
0.022 "						2.5	6.5	7.2	5	MKS2C022201A00_____
0.033 "						2.5	6.5	7.2	5	MKS2C023301A00_____
0.047 "						2.5	6.5	7.2	5	MKS2C024701A00_____
0.068 "						2.5	6.5	7.2	5	MKS2C026801A00_____
0.1 μF						2.5	6.5	7.2	5	MKS2C031001A00_____
0.15 "						2.5	6.5	7.2	5	MKS2C031501A00_____
0.22 "						3	7.5	7.2	5	MKS2C032201B00_____
0.33 "	2.5	6.5	7.2	5	MKS2B033301A00_____	3.5	8.5	7.2	5	MKS2C033301C00_____
0.47 "	3	7.5	7.2	5	MKS2B034701B00_____	3.5	8.5	7.2	5	MKS2C034701C00_____
0.68 "	3.5	8.5	7.2	5	MKS2B036801C00_____	4.5	9.5	7.2	5	MKS2C036801E00_____
1.0 μF	3.5	8.5	7.2	5	MKS2B041001C00_____	5	10	7.2	5	MKS2C041001F00_____
1.5 "	4.5	9.5	7.2	5	MKS2B041501E00_____	5.5	11.5	7.2	5	MKS2C041501H00_____
2.2 "	5	10	7.2	5	MKS2B042201F00_____	7.2	13	7.2	5	MKS2C042201K00_____
3.3 "	5.5	11.5	7.2	5	MKS2B043301H00_____	7.2	13	7.2	5	MKS2C043301K00_____
4.7 "	7.2	13	7.2	5	MKS2B044701K00_____	8.5	14	7.2	5	MKS2C044701M00_____
6.8 "	8.5	14	7.2	5	MKS2B046801M00_____	11	16	7.2	5	MKS2C046801N00_____
10 μF	11	16	7.2	5	MKS2B051001N00_____					

Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF	2.5	6.5	7.2	5	MKS2D021001A00_____	2.5	6.5	7.2	5	MKS2F021001A00_____
0.015 "	2.5	6.5	7.2	5	MKS2D021501A00_____	2.5	6.5	7.2	5	MKS2F021501A00_____
0.022 "	2.5	6.5	7.2	5	MKS2D022201A00_____	2.5	6.5	7.2	5	MKS2F022201A00_____
0.033 "	2.5	6.5	7.2	5	MKS2D023301A00_____	3.5	8.5	7.2	5	MKS2F023301C00_____
0.047 "	2.5	6.5	7.2	5	MKS2D024701A00_____	3.5	8.5	7.2	5	MKS2F024701C00_____
0.068 "	2.5	6.5	7.2	5	MKS2D026801A00_____	3.5	8.5	7.2	5	MKS2F026801C00_____
0.1 μF	2.5	6.5	7.2	5	MKS2D031001A00_____	4.5	9.5	7.2	5	MKS2F031001E00_____
0.15 "	3.5	8.5	7.2	5	MKS2D031501C00_____	5	10	7.2	5	MKS2F031501F00_____
0.22 "	3.5	8.5	7.2	5	MKS2D032201C00_____	5.5	11.5	7.2	5	MKS2F032201H00_____
0.33 "	4.5	9.5	7.2	5	MKS2D033301E00_____	7.2	13	7.2	5	MKS2F033301K00_____
0.47 "	4.5	9.5	7.2	5	MKS2D034701E00_____	8.5	14	7.2	5	MKS2F034701M00_____
0.68 "	5	10	7.2	5	MKS2D036801F00_____	11	16	7.2	5	MKS2F036801N00_____
1.0 μF	7.2	13	7.2	5	MKS2D041001K00_____					
1.5 "	8.5	14	7.2	5	MKS2D041501M00_____					
2.2 "	11	16	7.2	5	MKS2D042201N00_____					

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing.

Dims. in mm.



Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 128.

Rights reserved to amend design data without prior notification.

Continuation page 35

Continuation

General Data

Capacitance	400 VDC/200 VAC*					630 VDC/220 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF	2.5	6.5	7.2	5	MKS2G021001A00_	5.5	11.5	7.2	5	MKS2J021001H00_
0.015 "	2.5	6.5	7.2	5	MKS2G021501A00_	7.2	13	7.2	5	MKS2J021501K00_
0.022 "	3.5	8.5	7.2	5	MKS2G022201C00_	7.2	13	7.2	5	MKS2J022201K00_
0.033 "	4.5	9.5	7.2	5	MKS2G023301E00_	7.2	13	7.2	5	MKS2J023301K00_
0.047 "	4.5	9.5	7.2	5	MKS2G024701E00_	8.5	14	7.2	5	MKS2J024701M00_
0.068 "	5.5	11.5	7.2	5	MKS2G026801H00_					
0.1 μF	7.2	13	7.2	5	MKS2G031001K00_					
0.15 "	8.5	14	7.2	5	MKS2G031501M00_					
0.22 "	11	16	7.2	5	MKS2G032201N00_					

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing.

Dims. in mm.

The values of the WIMA MKM 2 and WIMA MKI 2 ranges according to the main catalogue 2009 are still available on request.

Part number completion:

Tolerance: 20 % = M


10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD






Taped version see page 128.

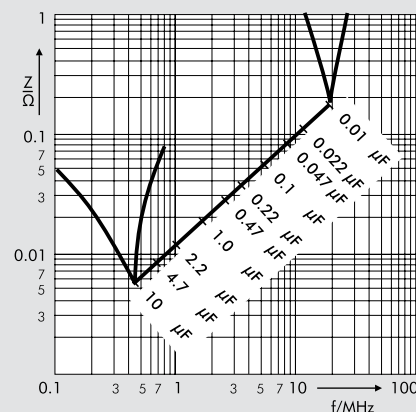

Impedance change with frequency (general guide).

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

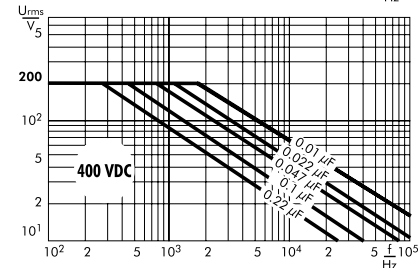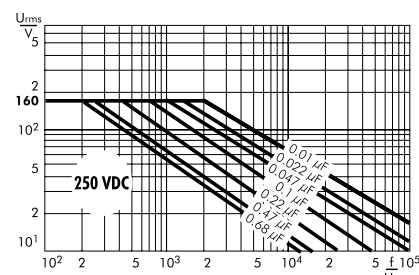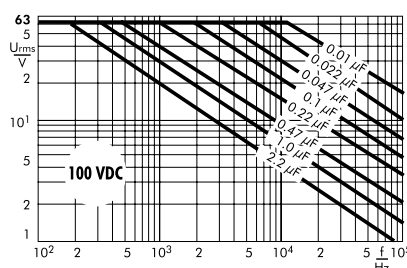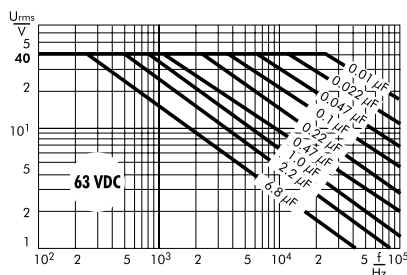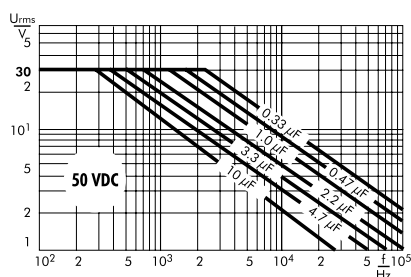

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $t < 5\text{ sec}$


Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

Wave soldering

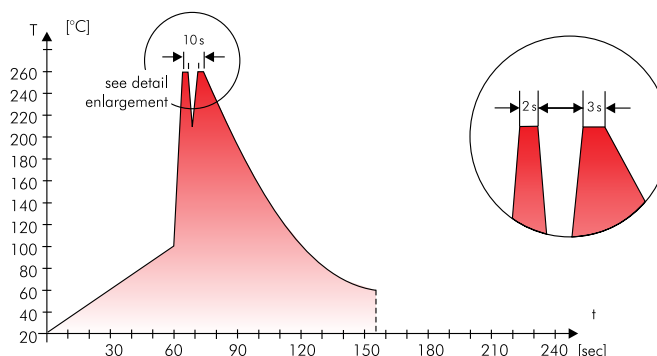

Typical temperature/time graph for double wave soldering

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- AQL check

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei
konform RoHS 2011/65/EU

WIMA capacitors are lead free
in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

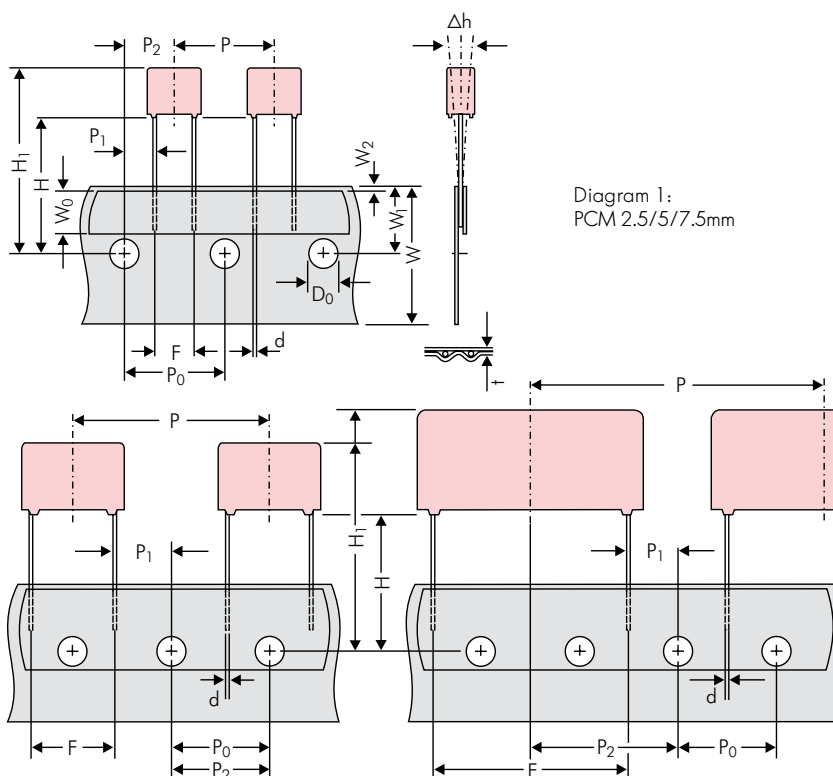


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 tapping possible with two feed holes between components

Dimensions for Radial Taping										
Designation	Symbol	PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping		
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5		
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape		
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5		
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.		
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2		
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5		
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch		
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7		
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3		
Feed hole centre to bottom edge of the component	H	16.5 ±0.3	16.5 ±0.3	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5		
		18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5		
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0		
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8		
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}		
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.		
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2		
Package (see also page 129)		ROLL/AMMO			AMMO					
		REEL ϕ 360 max. ϕ 30 ±1			REEL ϕ 360 max. ϕ 30 ±1				52 ±2 58 ±2 or 66 ±2	
Unit		B 52 ±2 58 ±2			ϕ 500 max. ϕ 25 ±1				54 ±2 60 ±2 or 68 ±2	
		depending on comp. dimensions			depending on PCM and component dimensions					
see details page 130.										

Dims in mm.

* Diameter of pins see General Data.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

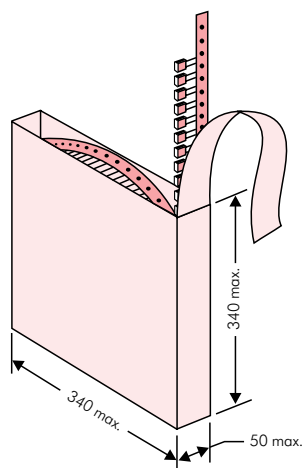

■ AMMO Packaging

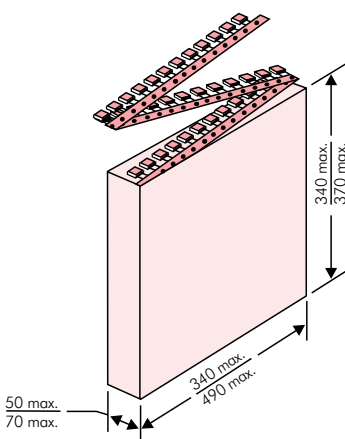

■ REEL Packaging

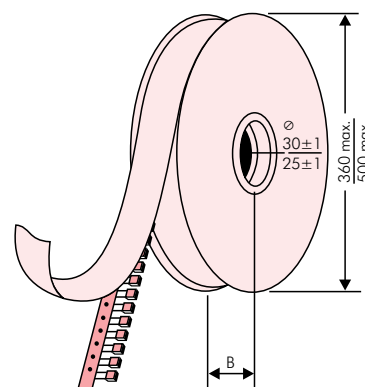

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made in Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EC	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
WIMA Confirmation No.: 0001004063000100		Gross Weight [g]: 1870	
WIMA Part No.: MKS2C034701C00K88D			
Handling Unit:	MKS 2	QTY: 5.000	COO: DE
MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5			
Standard 10% Loss - Standard Drähte 6-2			
1000067326 Vorlage Debitur Inland Week 03/2011			

BARCODE „Code 39“



Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL		AMMO					
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370			
						N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000										
	3	7.5	4.6	0C	5000										
	3.8	8.5	4.6	0D	5000										
	4.6	9	4.6	0E	5000										
	5.5	10	4.6	0F	5000										
5 mm	2.5	6.5	7.2	1A	5000										
	3	7.5	7.2	1B	5000										
	3.5	8.5	7.2	1C	5000										
	4.5	6	7.2	1D	6000										
	4.5	9.5	7.2	1E	4000										
	5	10	7.2	1F	3500										
	5.5	7	7.2	1G	4000										
	5.5	11.5	7.2	1H	2500										
	6.5	8	7.2	1I	2500										
	7.2	8.5	7.2	1J	2500										
	7.2	13	7.2	1K	2000										
	8.5	10	7.2	1L	2000										
	8.5	14	7.2	1M	1500										
11	16	7.2	1N	1000											
7.5 mm	2.5	7	10	2A	5000										
	3	8.5	10	2B	5000										
	4	9	10	2C	4000										
	4.5	9.5	10.3	2D	3500										
	5	10.5	10.3	2E	3000										
	5.7	12.5	10.3	2F	2000										
	7.2	12.5	10.3	2G	1500										
10 mm	3	9	13	3A	3000										
	4	8.5	13.5	FA	3000										
	4	9	13	3C	3000										
	4	9.5	13	3D	3000										
	5	10	13.5	FB	2000										
	5	11	13	3F	3000										
	6	12	13	3G	2400										
	6	12.5	13	3H	2400										
8	12	13	3I	2000											
15 mm	5	11	18	4B	2400										
	5	13	19	FC	1000										
	6	12.5	18	4C	2000										
	6	14	19	FD	1000										
	7	14	18	4D	1600										
	7	15	19	FE	1000										
	8	15	18	4F	1200										
	8	17	19	FF	500										
	9	14	18	4H	1200										
	9	16	18	4J	900										
	10	18	19	FG	500										
11	14	18	4M	1000											
22.5 mm	5	14	26.5	5A	1200										
	6	15	26.5	5B	1000										
	7	16.5	26.5	5D	760										
	8	20	28	FH	500										
	8.5	18.5	26.5	5F	500										
	10	22	28	FI	540*										
	10.5	19	26.5	5G	680*										
	10.5	20.5	26.5	5H	680*										
	11	21	26.5	5I	680*										
	12	24	28	FJ	450*										

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
						H16.5	H18.5	REEL		H16.5	H18.5	340 × 340		H16.5	H18.5
	W	H	L	Codes				ø 360	ø 500						
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	640*	–	–	–	–	460/340*	–	–	–	420	–
	11	21	31.5	6B	544*	–	–	–	–	380/280*	–	–	–	350	–
	13	24	31.5	6D	448*	–	–	–	–	300	–	–	–	290	–
	13	25	33	6K	336*	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	384*	–	–	–	–	270	–	–	–	250	–
	15	26	33	6L	288*	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	176*	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	176*	–	–	–	–	–	–	–	–	–	–
	20	32	33	6M	216*	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	144*	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	480*	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	408*	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	252*	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	144*	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	132*	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	108*	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	108*	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	84*	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	72*	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	50*	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	72*	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	60*	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	48*	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–
52.5 mm	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
 Field 5 - 6: Rated voltage
 Field 7 - 10: Capacitance
 Field 11 - 12: Size and PCM
 Field 13 - 14: Version code (e.g. Snubber versions)
 Field 15: Capacitance tolerance
 Field 16: Packing
 Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μF				2.5x6.5x7.2		-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:				Size:				Tolerance:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022				4.8x3.3x3 Size 1812 = KA				±20% = M			
SMD-PPS = SMDI				63 VDC = C0		47 pF = 0047				4.8x3.3x4 Size 1812 = KB				±10% = K			
FKP 02 = FKP0				100 VDC = D0		100 pF = 0100				5.7x5.1x3.5 Size 2220 = QA				±5% = J			
MKS 02 = MKS0				250 VDC = F0		150 pF = 0150				5.7x5.1x4.5 Size 2220 = QB				±2.5% = H			
FKS 2 = FKS2				400 VDC = G0		220 pF = 0220				7.2x6.1x3 Size 2824 = TA				±1% = E			
FKP 2 = FKP2				450 VDC = H0		330 pF = 0330				7.2x6.1x5 Size 2824 = TB				...			
MKS 2 = MKS2				600 VDC = I0		470 pF = 0470				10.2x7.6x5 Size 4030 = VA				Packing: AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ...			
MKP 2 = MKP2				630 VDC = J0		680 pF = 0680				12.7x10.2x6 Size 5040 = XA							
FKS 3 = FKS3				700 VDC = K0		1000 pF = 1100				15.3x13.7x7 Size 6054 = YA							
FKP 3 = FKP3				800 VDC = L0		1500 pF = 1150				2.5x7x4.6 PCM 2.5 = 0B							
MKS 4 = MKS4				850 VDC = M0		2200 pF = 1220				3x7.5x4.6 PCM 2.5 = 0C							
MKP 4 = MKP4				900 VDC = N0		3300 pF = 1330				2.5x6.5x7.2 PCM 5 = 1A							
MKP 10 = MKP1				1000 VDC = O1		4700 pF = 1470				3x7.5x7.2 PCM 5 = 1B							
FKP 4 = FKP4				1100 VDC = P0		6800 pF = 1680				2.5x7x10 PCM 7.5 = 2A							
FKP 1 = FKP1				1200 VDC = Q0		0.01 μF = 2100				3x8.5x10 PCM 7.5 = 2B							
MKP-X2 = MKX2				1250 VDC = R0		0.022 μF = 2220				3x9x13 PCM 10 = 3A							
MKP-X2 R = MKXR				1500 VDC = S0		0.047 μF = 2470				4x9x13 PCM 10 = 3C							
MKP-Y2 = MKY2				1600 VDC = T0		0.1 μF = 3100				5x11x18 PCM 15 = 4B							
MP 3-X2 = MPX2				2000 VDC = U0		0.22 μF = 3220				6x12.5x18 PCM 15 = 4C							
MP 3-X1 = MPX1				2500 VDC = V0		0.47 μF = 3470				5x14x26.5 PCM 22.5 = 5A							
MP 3-Y2 = MPY2				3000 VDC = W0		1 μF = 4100				6x15x26.5 PCM 22.5 = 5B							
MP 3R-Y2 = MPRY				4000 VDC = X0		2.2 μF = 4220				9x19x31.5 PCM 27.5 = 6A							
Snubber MKP = SNMP				6000 VDC = Y0		4.7 μF = 4470				11x21x31.5 PCM 27.5 = 6B							
Snubber FKP = SNFP				250 VAC = 0W		10 μF = 5100				9x19x41.5 PCM 37.5 = 7A							
GTO MKP = GTOM				275 VAC = 1W		22 μF = 5220				11x22x41.5 PCM 37.5 = 7B							
DC-LINK MKP 3 = DCP3				300 VAC = 2W		47 μF = 5470				94x49x182 DCH_ = H0							
DC-LINK MKP 4 = DCP4				400 VAC = 3W		100 μF = 6100				94x77x182 DCH_ = H1							
DC-LINK MKP 4S = DCPS				440 VAC = 4W		220 μF = 6220				...							
DC-LINK MKP 5 = DCP5				500 VAC = 5W		1000 μF = 7100											
DC-LINK MKP 6 = DCP6														
DC-LINK HC = DCH_																	
DC-LINK HY = DCHY																	